


NAME PLATE  
用途銘板

NO.	DIP SWITCH DIP スイッチ	ALARM TONE 音色	
		ON 1 2 3 4	Pi-
1	ON 1 2 3 4	Pi- Pi- Pi-	HI FREQ. INTERRUPTED
2	ON 1 2 3 4	PiPo PiPo	HI&LOW FREQ. TONE
3	ON 1 2 3 4	Pi Pi Pi	HI FREQ. INTERRUPTED (RAPID)
4	ON 1 2 3 4	Quu Quu Quu	LOW→HI FREQ. CONT.
5	ON 1 2 3 4	BELL	
6	ON 1 2 3 4	CHAIM	
7	ON 1 2 3 4	OPTION	
8	VOLUME 音量		ON 96 dB/1m 1 2 3 4 Default
			ON 85 dB/1m 1 2 3 4

ALARM TONE CAN BE SELECTED BY INTERNAL  
DIP SWITCH (1-TONE SELECT TYPE)  
音色は内部DIPスイッチで変更可能(1音色選択式)

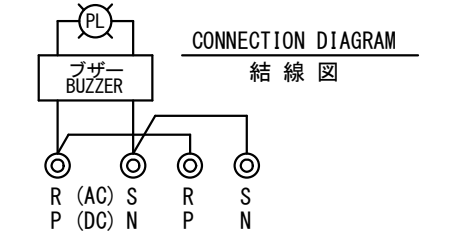

SOURCE 電源	CURRENT 電流
AC220 V, 1φ, 60 Hz	25 mA
AC100~115 V, 1φ, 60 Hz	50 mA
DC22~24 V	100 mA

PROTECTION GRADE 保護等級	IP22
SOUND LEVEL 音圧レベル	96 dB/1m
LAMP ランプ	LED
COLOR 色	<input type="checkbox"/> RED & DARKGRAY <input type="checkbox"/> WHITE & DARKGRAY (MAKER STANDARD)
MASS 質量	0.35 kg

**IBUKI** IBUKI KOGYO CO.,LTD.  
伊吹工業株式会社

**SBZ-2F**  
ELECTRONIC BUZZER  
電子ブザー

FLUSH MOUNT TYPE  
埋込形  
OUTLINE VIEW  
外形図

			D. W. N.	N. Tanaka
			C. K. D.	Y. Ueda
			DATE	JUL. -25. 2022
			SCALE	1/2
DATE	REV.	REMARKS	DWG. NO	ibk-03010502